



HRPS1

### 1. Installation Preparation

Check your package contents to make sure you have everything you need to begin.

- HomeRemote Pro Internet Gateway
- Power Adapter (for the Gateway)
- Ethernet Cable (for the Gateway)
- Mounting Kit (for the Gateway)
- HomeRemote Wireless Lamp Module
- HomeRemote Door/Window Sensor
- Sensor Mounting Kit
- 3 x AAA Batteries


You will need the following items to complete your installation:

- Home Network Router
- Available Power Outlet (2X)
- Computer / Laptop with Internet Access
- HomeRemote Pro Compatible Modules or Cameras
- Phillips Screw Driver
- HomeRemote Pro Product Key (Located at the bottom of your Gateway)
- Optional: Power Extension Cable or Power Strip

### 2. Connect the Gateway

Your HomeRemote Pro Gateway should be placed next to your Home Network Router. Locate your Home Network Router and follow these steps to connect your HomeRemote Pro Gateway:

- a. Use the included Ethernet Cable to connect the Gateway to your Router. One end of the cable connects to the "Network" port on the Gateway. The other connects to an available "LAN/Computer" port on your router. (See image on right)
- b. Connect the Power Adapter to the Gateway. Connect one end of the included power adapter to an available power outlet and plug the other end into the Power Adapter port on your Gateway. (See image on right)

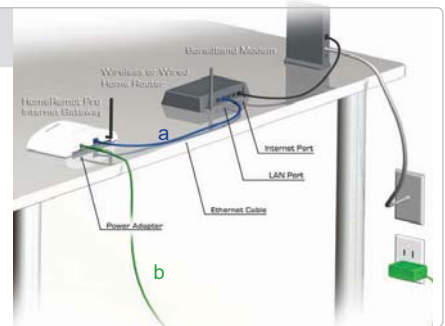

### 3. Create an Account Online

Use a computer in your home with internet access and open a web browser. To log on to the HomeRemote Pro web page, enter this address in your browser's address bar:  
<http://pro.homeremote.net>



Once the page loads, click on [Create a New Account](#)

### 4. Setup Wizard

The Setup Wizard will now guide you through the setup of your home and modules.

**If you need help understanding any part of the Setup Wizard, place your mouse cursor over the specific item and a help box will appear.**

- a. **Terms and Conditions** Read and Click "Accept" to continue.
- b. **Introduction** After you have read the overview of the setup process click **Next** to continue.
- c. **Hardware Connection** Double check your Gateway connection and then click **Next** to continue.



### 5. Enter Your Information

Enter your login information here. You will need the **Product Key** of your HomeRemote Pro Gateway to complete this step.

- Home Name:** This is the name that you will use to identify your Gateway in the Server
- Email:** Your Email address will be used as your username each time you login to the Server.
- Password:** Select a password that you will remember. You will use this password each time you login as well.

Your 12-digit **Product Key** is located on the bottom of your HomeRemote Pro Gateway as shown in the picture.

You may use this field to write down your Product Key

Click **Next** to continue.



### 6. Test Connection

The Setup Wizard will now check if your Gateway is properly connected to the HomeRemote Pro Servers.

If an update for the Gateway is available, the Server will automatically download and install the software updates.

This process may take several minutes, be patient. When it has completed, click **Next** to continue.



Note: if your Gateway is not properly connected to the HomeRemote Pro Servers you will not be able to continue the installation.

Check your hardware connections, Internet connection and try again.

If you continue to have problems, contact Hawking technical support at 1.888.202.3344.

### 7. Customize Your Home Layout & Prepare to Add Modules

Add the rooms in your home where you plan on installing modules.

- a. Enter the name of the room you wish to add. (i.e. Living Room)
- b. Select the section of your home the room is located. (i.e. 1st Floor)
- c. Click **Add Area/Room** and repeat these steps for each additional room.
- d. Click **Next** when you are finished. The Setup Wizard will now guide you through the setup of your home and modules.

Watch the video for visual instructions on how to add your modules. There is also a web tutorial for you to access at anytime during this step to walk you through how to add modules.



After viewing the video and web tutorials. Prepare your **Plug-In modules** by placing them **within 5 feet of your Gateway** as shown to the right. (Using an extension cord or power strip may help here)

#### For Door Sensors and Motion Detectors:

Install the batteries now (as shown in the right image).

Use a phillips screw driver to remove the screws on the battery cover. Insert the batteries and refasten the battery cover.

#### For Light Switches and Other Z-Wave Modules:

If your Z-Wave module is permanently installed and located far from the Gateway, you will need to use a Z-Wave remote control to install them. View the online manual for more detailed instructions on this procedure.

**Instructions for adding and removing modules is continued on the other side of this guide.**





## 8. Add Modules & Sensors to Your System


Each module or sensor has a "Program" button used for adding devices into your system. Locate your **Plug-in Module** and follow the steps below to add them to your system:

- Plug in your Module - make sure it is within 5 feet of your Gateway. Press the "Detect Module" button on the Add/Remove module page.
- Within 10 seconds of pressing the "Detect Module" button, press the "Program" button on your module. The Setup Wizard should automatically detect your module and the module detail fields should appear (as shown in image a).
- Name the Module (i.e. Floor Lamp), assign to a room (i.e. Living Room) and select a graphical icon that you feel represents your device the best (i.e. Light bulb) for the module you are currently installing. Click "Add Module" when you are done.
- Repeat these steps for all modules and sensors you plan on adding into you system. You can remove the Plug-In modules after you have programmed them to make space for adding more Plug-In modules. When you are done, click **Next** to continue.

If you have any problems adding modules into your system, please contact technical support at 888-202-3344. You may also view the web tutorial or click the Help tab to view the Online User's Manual.

If you are adding a preconfigured network into the system, you will need to clear the settings on each module before adding them to the HomeRemote Pro system by using the "Remove Module" button on the Setup Wizard.


To add a network from another remote control, you will need to transfer the settings from the remote to the Gateway.

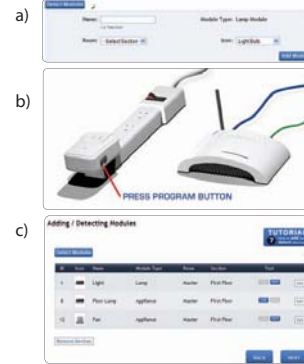

## 9. Place Modules into Rooms & Check Connections

After you have added all your modules and sensors into the HomeRemote Pro System, you are now ready to install them in their specific rooms. When installing your modules and sensors, make sure to follow these guidelines:

- Install the module closest to your Gateway first, then install the second closest and so on.
- The HomeRemote Pro Gateway uses each module to repeat the wireless signal, thus extending your overall network range. It is recommended that each installed module be **less than 100 feet** from the next closest module. (Door Sensors and Motion Detectors do not have the repeater function).
- Plug in your lamps and appliances to your Plug-in Modules at this time.



### Check Wireless Module Connections:

After you have installed and placed your wireless modules and sensors into your desired locations, the wizard will help you check if they are all setup correctly. Click the **Check Connections button** to perform a scan of your network. (This may take a few minutes so please be patient).



Next to each module, there will be a green icon or a red icon . Green means the module or sensor is functioning correctly. Red means the module is out of range or has no power. Install the modules or sensors with red indicators in a location closer to the Gateway and check the connection again. When all modules and sensors show green indicators, click **Next** to continue.

## 10. Pro-Level / Finish

### Congratulations!

The setup of your HomeRemote Pro System is now complete. You may click **Finish** now to begin using the HomeRemote Pro Web Interface. You can sign up for the **HomeRemote Pro-Level Service** to gain access to all features offered by the HomeRemote Pro System.



To access your account in the future:

Log onto your account at <http://pro.homeremote.net>

Enter your Email and Password to access the HomeRemote Pro Web Interface at anytime.

## HomeRemote Pro-Level Service and Cell Link



Subscribe to the Pro-Level Service to take advantage of all that your HomeRemote Pro System has to offer.

### Pro-Level Features and Benefits:

#### View Live Video Remotely over the Web

- View live video from HomeRemote Pro Cameras
- Watch your children or pets while away at work or vacation
- See your home, anytime, anywhere

#### Control all devices Remotely over the Web

- Access your home and turn lights on and off while you are away
- Set your heater/air conditioner to turn on before you return home
- Lock your doors at anytime

#### Receive Email and Text Message alerts based on User-defined events

- Receive alerts of opened doors or windows
- Be notified when your children arrive home

#### Monitor, Control your home and view live Video from your Cell Phone (Cell Link)

- Use your cell phone as a remote control to your home (compatible with most cellular phones with internet access)

\*Some features require specific Z-Wave modules such as Z-Wave enabled door locks, thermostats, and window shades. For more information on where to purchase these contact Hawking Technologies at 888-662-8828



## Find More Accessories

Visit the HomeRemote Pro Online shop for information on compatible cameras, accessories, remote controls, thermostats and modules.

<http://www.homeremote.net/prostore> or call: 888-662-8828



## Support Contacts

We'd love to hear from you! If you have any questions regarding the setup of your HomeRemote Pro System please give us a call using the number below.

Hawking Technologies Sales: 888-662-8828  
 Hawking Technologies Sales Email: sales@hawkingtech.com  
 Hawking Technologies Customer Service: 949-790-0800 x 1000

HomeRemote Pro Technical Support: 888-202-3344  
 HomeRemote Pro Technical Support Email: techsupport@hawkingtech.com

HomeRemote Pro-Level / Cell Link Support: 877-466-6744  
 HomeRemote Pro-Level Service & Billing: 877-466-6744