



### 1. Installation Preparation


- Check your package contents to make sure you have everything you need to begin:
- HomeRemote Pro Wireless Video Camera w/ Night Vision
  - Power Adapter (for HomeRemote Pro Camera)
  - Ethernet Cable (for Connection to Router)
  - Camera Mounting Kit and Stand
  - CD (Recording & Viewing Software)
  - Wireless Camera Antenna

- You will also need the following products to complete your installation:
- Home Network Router
  - HomeRemote Pro Camera Product Key
  - HomeRemote Pro Server Account
  - Optional: Phillips Screw Driver for Mounting
  - Available power outlet
  - Computer / Laptop with Internet Access
  - HomeRemote Pro Internet Gateway
  - Pro Level Service Required for Remote Video Monitoring

### 2. Connect the Camera


Locate your Home Network Router. Place the HomeRemote Pro Video Camera with Night Vision next to your Home Network Router during the setup process. Follow the steps below to connect your HomeRemote Pro Gateway:

- Use the included Ethernet Cable to connect the Camera to your Router. One end of the cable connects to the "LAN" port on the Camera. The other connects to an available "LAN/Computer" port on your router. (see image on right)
- Connect the Power Adapter to the Camera. Connect one end of the included power adapter to an available power outlet and plug the other end into the Power Adapter port on your Camera. (see image on right)
- Screw on the Camera Antenna. Locate the wireless antenna for the camera in the packaging and screw it onto the antenna port of the camera.

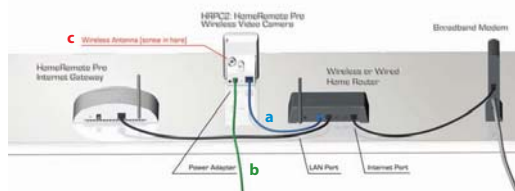

### 3. Sign onto your Account

Use a computer in your home with Internet access and open a web browser. Log on to the HomeRemote Pro web page enter this address in your browser's address bar:  
<http://pro.homeremote.net>

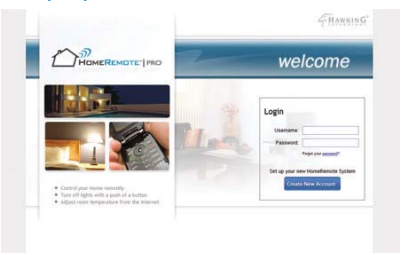

Enter the login information to access your account.


### 4. Add Your Camera to your Account

- After logging into the HomeRemote Pro Servers, click the "Access Home" button to enter the Home Status page of your home.
- While on the Home Status page, click the "Camera Setup" button located on the left sidebar or if you have not installed a camera yet, there will be an "Install" button in the main window of the Home Status page as shown on the right.
- In the Camera Setup page fill in the following information:

**Camera Name:** Select a custom identification name for your camera, such as Baby Cam or Front Door Camera.  
**Room:** From the drop down menu, select a room where you will place the camera after the initial installation. If the room is not listed, you will need to create one from the System page and then restart the Camera Setup process.  
**Product Key:** The Product Key for your camera can be located on the bottom of your HomeRemote Pro Camera. It is a 12-digit alpha numeric key. (see right image)

You may use this field to write down your Product Key

Click "Add Camera" to complete the setup process

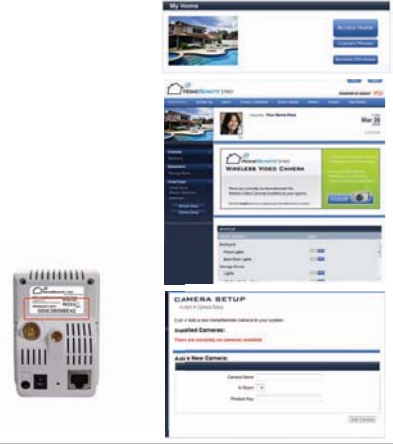

### 5. Test Camera Connection

Click **Home Status** to get to the camera viewer. Your camera should now be listed on the Home Status page as shown below.

Click your mouse on the thumbnail picture of your camera and wait until a connection has been established. In a few seconds, you should begin to see video from your camera.



If a connection is not established, you will need to double check your hardware connections and make sure the Product Key you entered is correct. **Try unplugging the power adapter and plugging it back in.**

If you still do not have a connection by this point, contact Hawking Technologies Technical Support at 888-202-3344.


To setup your camera wirelessly, move on to the next step.

### 6. Wireless Setup (Optional)

Now that your camera is up and running its time to setup your wireless connection. Make sure you are using a computer that is connected to the same network (using the same router) as your HomeRemote Pro Gateway and HomeRemote Pro Camera. Follow the steps below:

- Click on "Camera Setup" from the Home Status page.
- Locate your installed camera and click "Configure this Camera Locally". Note: To configure your camera you MUST be in the same network / home as where your Gateway is installed. If not the interface will display: **Camera Currently Unavailable.**
- A pop up window will appear with the configuration menu for your camera. You will be prompted for a Username and Password. Enter the default login:  
Username: admin  
Password: 1234
- Click on "Setup Wi-Fi Connection" then click "Enable" to turn on the Wi-Fi connection on your camera. Click **Scan** to detect for wireless networks within your area. Once your network has been detected, **select it** and click **Save**.

**Note:** If your Wi-Fi network has wireless security enabled, you will need to select your security type and enter your security key. Check with your Wi-Fi network administrator if you do not have this information. For help please contact Hawking Technologies Technical Support.

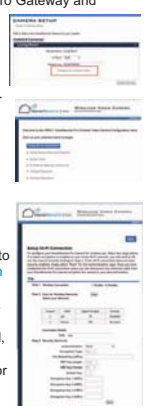


### 7. Unplug and Position

**Congratulations!**

With your wireless connection now configured, you can reposition your camera. Remove the ethernet cable that connects your camera to your router and unplug the power adapter to your camera. Then, place the camera in your desired location and plug the power adapter back in.

Use the included mounting kit and stand for wall installations.

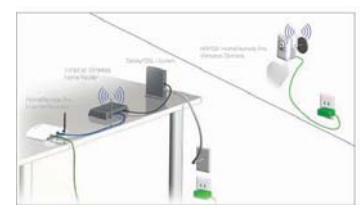

**View the other side of this guide for information on key features of your HomeRemote Pro Camera**